


ARMOUR-GUARD RAIL RAIL BRIDGE WATERPROOFING AND DIELECTRIC MEMBRANE SYSTEM

With Ballast Mat

Layer	Material	Application Rate	Thickness
1	Primer ¹	Armour-Guard Primer S or F	0.3 kg/m ² to 0.5 kg/m ² (80 ft ² /gal to 130 ft ² /gal)
	Broadcast aggregate	Quartz 0.3 to 0.7 mm (50/25 mesh)	0.3 kg/m ² (0.5 lbs/yd ²)
2	Membrane ²	Armour-Guard Membrane Manual	Minimum 3.6 kg/m ² (13 ft ² /gal)
	(1 or 2 layers)	Armour-Guard Membrane Spray	
3	Ballast mat adhesive	Armour-Guard Ballast Mat Adhesive	Minimum 1.2 kg/m ² (40 ft ² /gal)

¹ Porous or uneven substrates may require multiple primer coats

² Membrane application rate/thickness: min 3.6 kg/m² (120 mils) for single layer; min 1.8 kg/m² each (60 mils each) for two layers

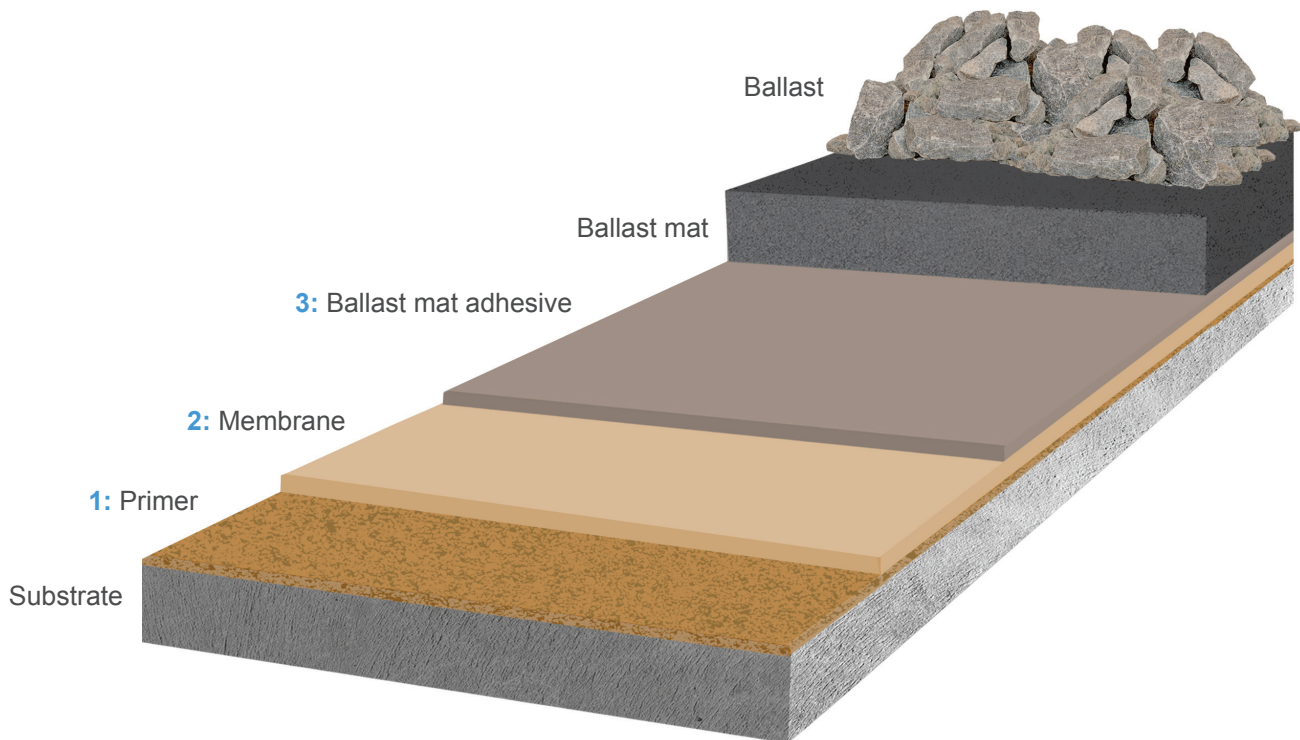

WARRANTY: The following warranty is made in lieu of all other warranties, either expressed or implied, and applies to goods manufactured by Transpo Industries, Inc. and its subsidiaries only. This product is manufactured of select raw materials by skilled technicians. Neither seller nor manufacturer has any knowledge or control concerning the purchaser's use of the product and no warranty is made as to the result of any use. The only obligation of either seller or manufacturer shall be to replace any quantity of this product that proves to be defective. Neither seller nor manufacturer assumes any liability for injury, loss, or damage resulting from use of this product.