


ARMOUR-GUARD BDM MMA WATERPROOFING AND CORROSION INHIBITION SYSTEM UNDER ASPHALT

MMA Bond Coat

Layer		Material	Application Rate	Thickness
1	Primer on substrate ¹	Armour-Guard Primer S or F	0.3 kg/m² to 0.5 kg/m² (80 ft²/gal to 130 ft²/gal)	0.3 mm to 0.5 mm (13 to 20 mils)
	Broadcast aggregate	Quartz 0.3 to 0.7 mm (50/25 mesh)	0.3 kg/m² <i>(0.5 lbs/yd</i> ²)	
2	Membrane ² (1 or 2 layers)	Armour-Guard Membrane Manual Armour-Guard Membrane Spray	Minimum 2.4 kg/m² (20 ft²/gal)	Minimum 2.0 mm (Minimum 80 mils)
3	Bond coat ³	Armour-Guard Bond Coat	Minimum 1.0 kg/m² (40 ft²/gal)	Minimum 1.0 mm (Minimum 40 mils)
	Broadcast aggregate	Quartz 2.0 to 3.5 mm (10/6 mesh)	Minimum 1.0 kg/m² <i>(2 lbs/yd²)</i>	

¹ Porous or uneven substrates may require multiple primer coats

³ The Armour-Guard BDM MMA System is installed and finished ready to receive asphalt overlay. No further additional tack coat by others is required or should be used.

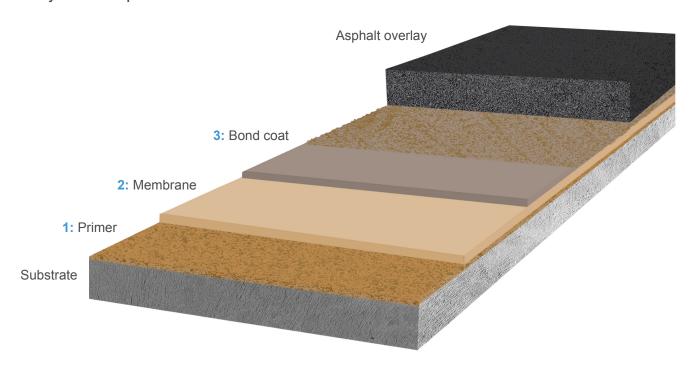

WARRANTY: The following warranty is made in lieu of all other warranties, either expressed or implied. This product is manufactured of selected raw materials by skilled technicians. Neither seller nor manufacturer has any knowledge or control concerning the purchaser's use of either product and no warranty is made as to the results of any use. The only obligation of either seller or manufacturer shall be to replace any quantity of this product that proves to be defective. Neither seller nor manufacturer assumes any liability for injury, loss, or damage resulting from use of this product.

The value ranges stated above are based on system processing under laboratory conditions. Equipment configurations and/or field application conditions may produce variances in final system values.

To be used as general guidelines only. The base language for this system build sheet is English.

² Membrane application rate/thickness: min 2.4 kg/m² (80 mils) for single layer; min 1.2 kg/m² each (40 mils each) for two layers